# D-Link
# Quick Installation Guide

**This product works with the following operating systems: Windows XP, Me, 2000, 98 Second Edition, Macintosh OS X v10.2**

# DBT-120
Personal*Air*™ Bluetooth USB Adapter

## Before You Begin

You must have at least the following:

- Windows XP/Me/2000/98SE or Macintosh OS X v10.2
- One Available USB Port
- CD-ROM Drive

## Check Your Package Contents

These are the items included with your purchase:

- **DBT-120 USB Bluetooth Adapter**

- **CD-ROM (containing Drivers, Installation Guide, Manual, and Warranty)**

- **USB Extension Cable**

If any of the above items are missing, please contact your reseller.

# ① Installing the Bluetooth Software for Windows

**Insert** the **D-Link Personal***Air* **DBT-120 Driver CD** in the CD-ROM drive.

> ⚠️ **Install the driver and software on the D-Link CD BEFORE installing the DBT-120 USB Bluetooth Adapter into your computer.**
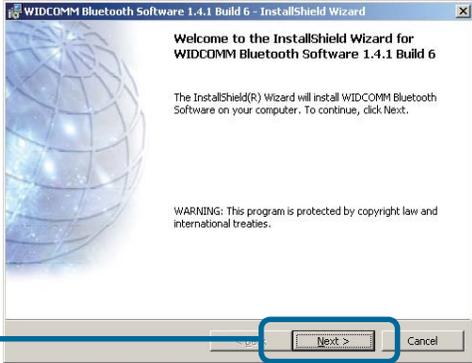
If this Autorun screen does not automatically appear, click on **Start** > **Run**, enter "**D:\Autorun.exe**" and click **OK**. "**D**" represents the letter of your CD-ROM drive.
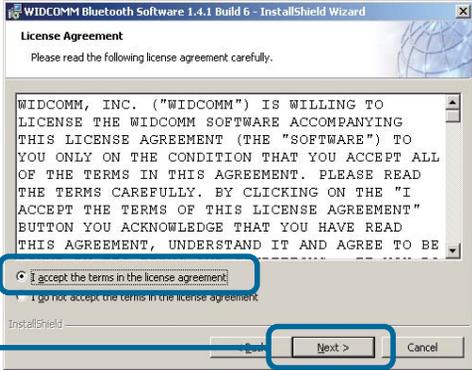
Click **Install Bluetooth Software**

Click **Next**

Click **Accept**

Click **Next**

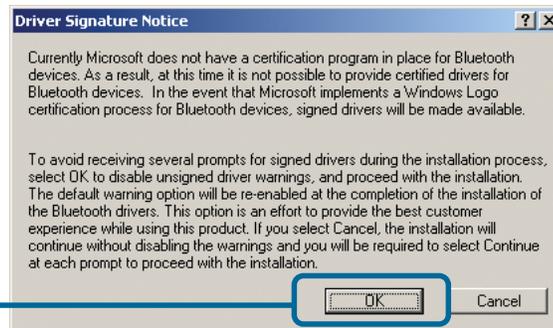# **1** Installing the Bluetooth Software for Windows *(continued)*

**WIDCOMM Bluetooth Software 1.4.1 Build 6 - InstallShield Wizard**

**Destination Folder**
Click Next to install to this folder, or click Change to install to a different folder.

Install WIDCOMM Bluetooth Software 1.4.1 Build 6 to:
E:\Program Files\WIDCOMM\Bluetooth Software\

Change...

InstallShield

< Back    **Next >**    Cancel

**Click Next**

---

**WIDCOMM Bluetooth Software 1.4.1 Build 6 - InstallShield Wizard**

**Ready to Install the Program**
The wizard is ready to begin installation.

Click Install to begin the installation.

If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.

InstallShield

< Back    **Install**    Cancel

**Click Install**

---

Only **Windows XP** and **Windows 2000** Users will see this screen.

**Driver Signature Notice**

Currently Microsoft does not have a certification program in place for Bluetooth devices. As a result, at this time it is not possible to provide certified drivers for Bluetooth devices. In the event that Microsoft implements a Windows Logo certification process for Bluetooth devices, signed drivers will be made available.

To avoid receiving several prompts for signed drivers during the installation process, select OK to disable unsigned driver warnings, and proceed with the installation. The default warning option will be re-enabled at the completion of the installation of the Bluetooth drivers. This option is an effort to provide the best customer experience while using this product. If you select Cancel, the installation will continue without disabling the warnings and you will be required to select Continue at each prompt to proceed with the installation.
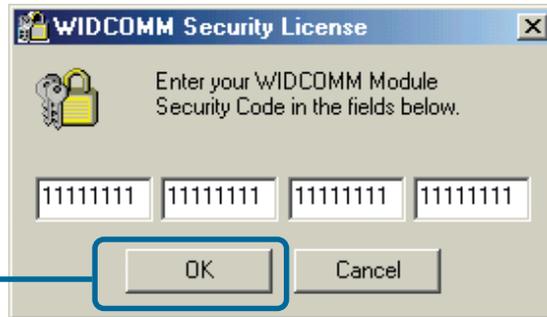
OK    Cancel

**Click OK**

When this screen appears, connect the **DBT-120** to an available USB port on your USB host adapter or USB hub.

Click **OK**

**Bluetooth device not found**

⚠ No Bluetooth device was detected. Please make sure that your Bluetooth device is plugged in properly and click 'OK' to continue installation. Click 'Cancel' to continue installation without the Bluetooth device.

[ OK ]    [ Cancel ]

A 32-digit security code is included with your **DBT-120** and is located on your driver CD cover *. Carefully enter the security code to access the software**.

Click **OK**

**WIDCOMM Security License**

Enter your WIDCOMM Module Security Code in the fields below.

| 11111111 | 11111111 | 11111111 | 11111111 |

[ OK ]    [ Cancel ]

*If you have misplaced or lost the security code included with your **DBT-120**, you can obtain the security code from this site: **http://66.45.42.85/ dlink/**. You will be asked for your **DBT-120's BD Address**, which is a unique 12-digit number that identifies your product. The **BD Address** is located in the **MAC:** field on the label of the **DBT-120**. Once you fill out the required information on the webpage and submit your request, the security code will be emailed to you.

**If you cannot access your **DBT-120** using the software, the security code was entered incorrectly. Please refer to the **Troubleshooting** section of the manual on this CD for help.

# 1 Installing the Bluetooth Software for Windows *(continued)*

**InstallShield Wizard Completed**

The InstallShield Wizard has successfully installed WIDCOMM Bluetooth Software. Click Finish to exit the wizard.

Click **Finish**

Only **Windows 2000**, **Windows Me**, and **Windows 98SE** Users will see this screen.

**WIDCOMM Bluetooth Software Installer Information**

You must restart your system for the configuration changes made to WIDCOMM Bluetooth Software to take effect. Click Yes to restart now or No if you plan to restart later.

Click **Yes**

# 2 Using the Bluetooth Configuration Wizard

After you have completed the driver and software installation and reboot your computer, a Bluetooth icon will appear on your desktop and in the bottom right hand corner of your desktop screen (systray). The Bluetooth icon gives you access to **My Bluetooth Places**, for configuring your Bluetooth settings.

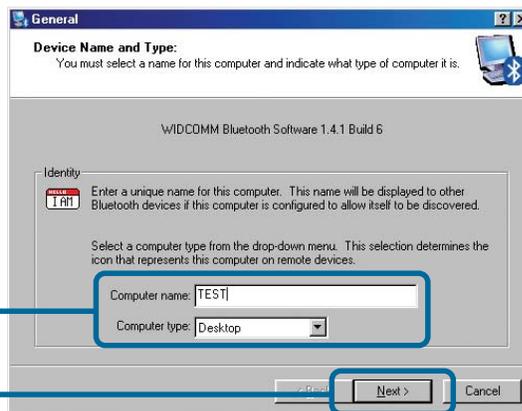Double-click the **Bluetooth** icon for access to **My Bluetooth Places**.

3:10 PM

The **Bluetooth Configuration Wizard** launches the first time that you double click on **My Bluetooth Places**.
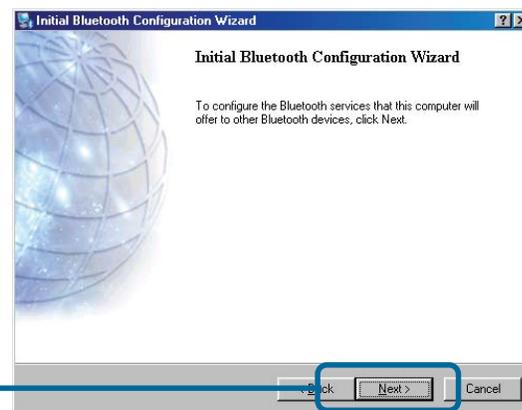
Click **Next**
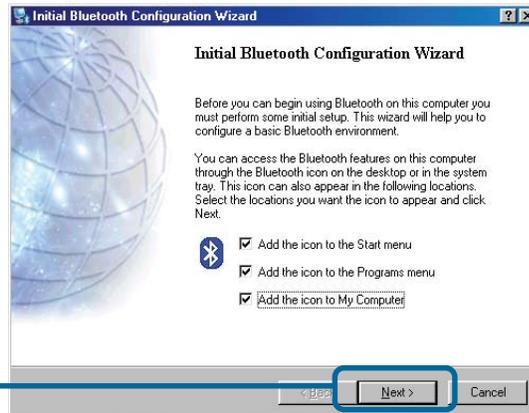
Type a unique name for your Computer. Select Desktop or Laptop

Click **Next**

Click **Next**
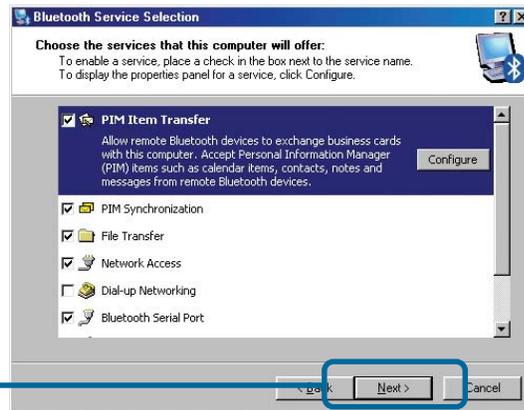
6

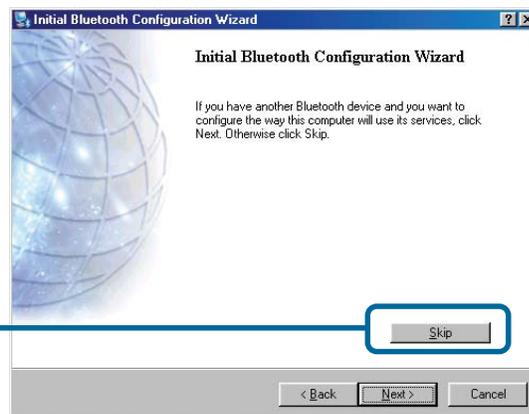## 2 Using the Bluetooth Configuration Wizard *(continued)*

Select the Services that your **DBT-120** will provide to other Bluetooth products.

**Click Next**

You can choose to configure your other Bluetooth devices at this point. Otherwise, click **Skip** to finish the configuration for your **DBT-120**.

**Click Skip**

**Click Finish**

# 3 The Installation is Complete!

The **DBT-120 Bluetooth USB Adapter** is now able to connect to other Bluetooth devices and your setup is complete! For detailed explanations on using the Bluetooth software for Windows and troubleshooting tips, please refer to the **DBT-120 Manual** on the CD included with this product.

# 4 DBT-120 Installation for Macintosh OS X v 10.2

Macintosh OS X 10.2 has built-in Bluetooth support for a true plug and play experience.  Simply insert the **D-Link DBT-120 Bluetooth USB Adapter** into an available USB port on your Macintosh OS X v10.2 and the installation will proceed automatically.

Insert the **DBT-120** into an available USB port on your Macintosh desktop or laptop.

# Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

## Tech Support for customers within the United States:

***D-Link Technical Support over the Telephone:***
(877) 453-5465
24 hours a day, seven days a week.

***D-Link Technical Support over the Internet:***
http://support.dlink.com
email:support@dlink.com

## Tech Support for customers within Canada:

***D-Link Technical Support over the Telephone:***
(800) 361-5265
Monday to Friday 8:30am to 9:00pm EST

***D-Link Technical Support over the Internet:***
http://support.dlink.ca
email:support@dlink.ca

**D-Link®**

**Building Networks for People**